



QUICKSTART OF GPRS TEMPERATURE (& HUMIDITY) SENSOR

1. Standard Package

1 GPRS Temperature Monitor

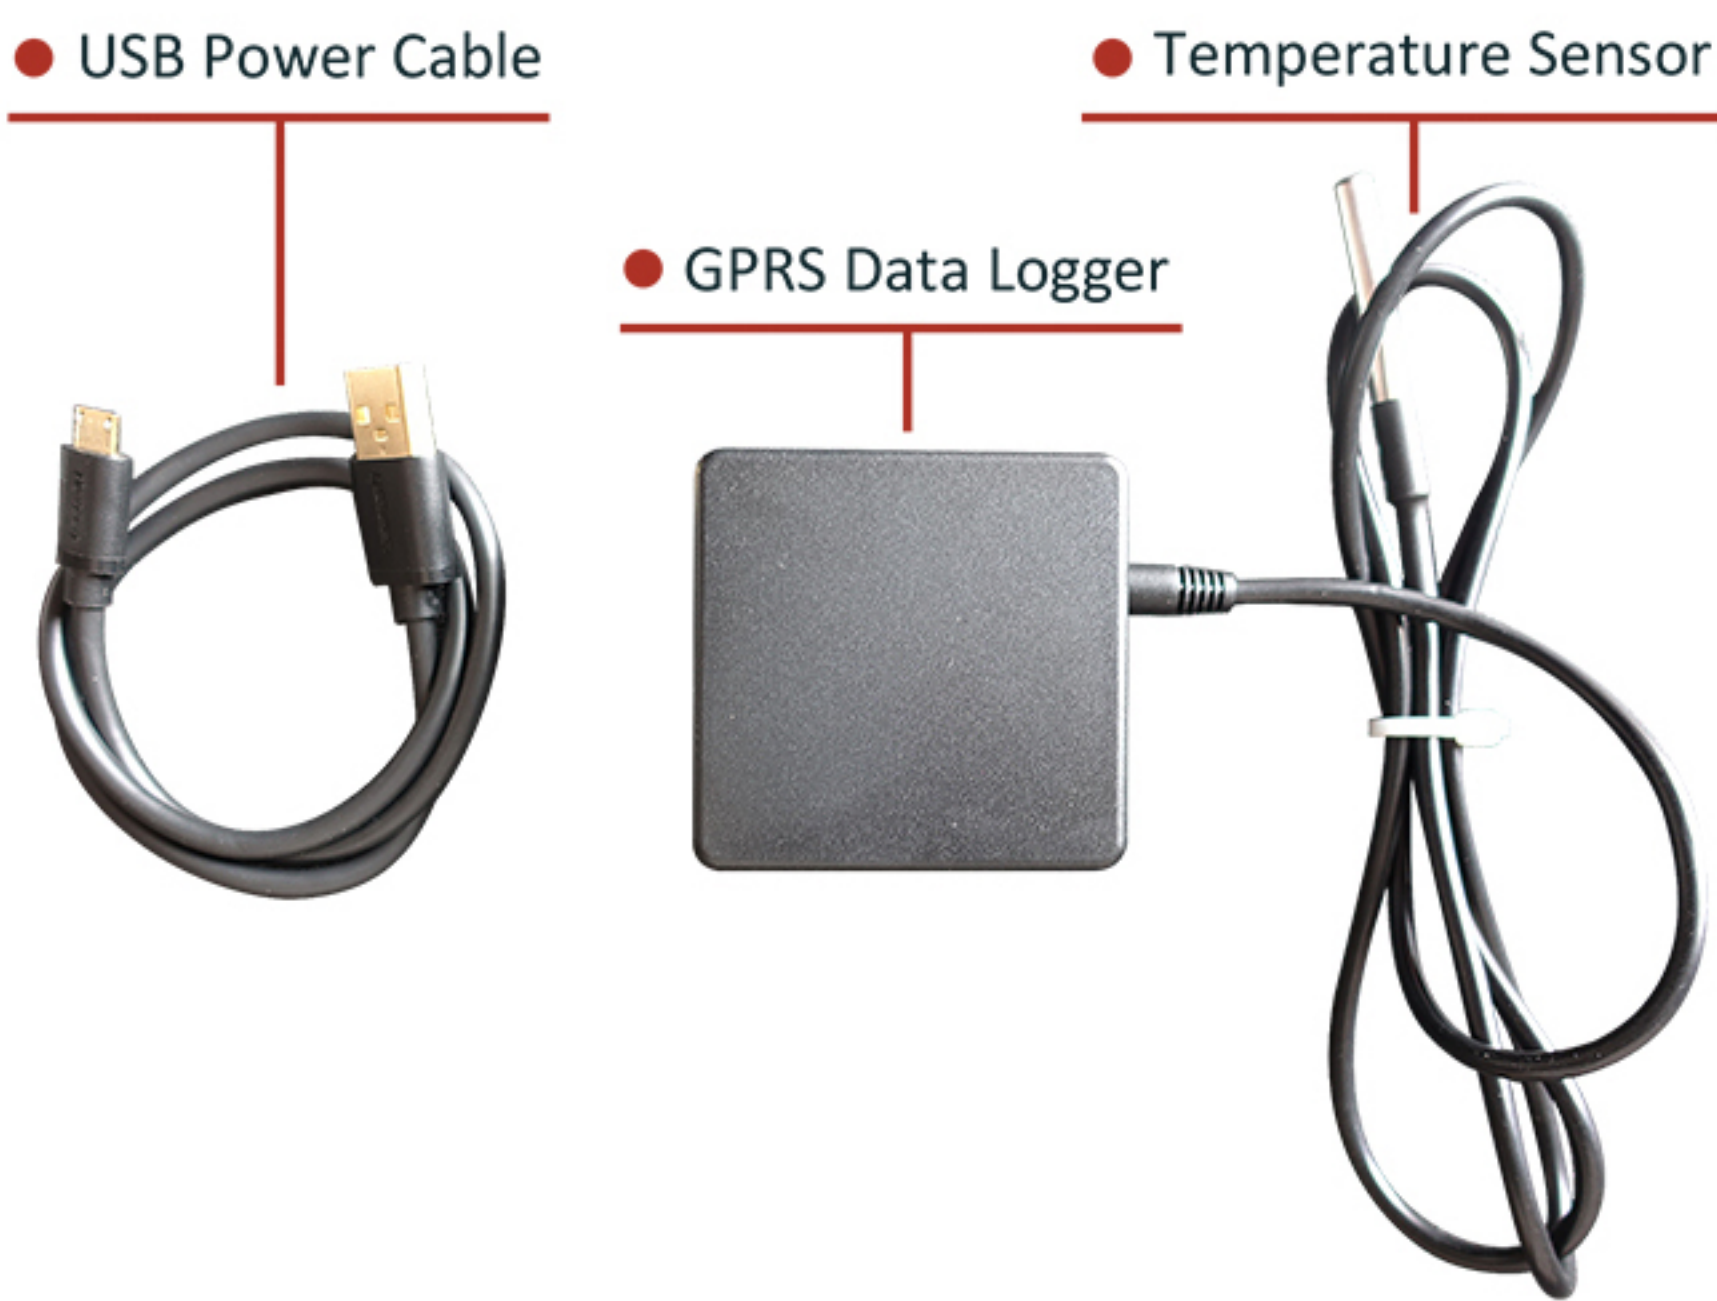

2 GPRS Temperature & Humidity Monitor

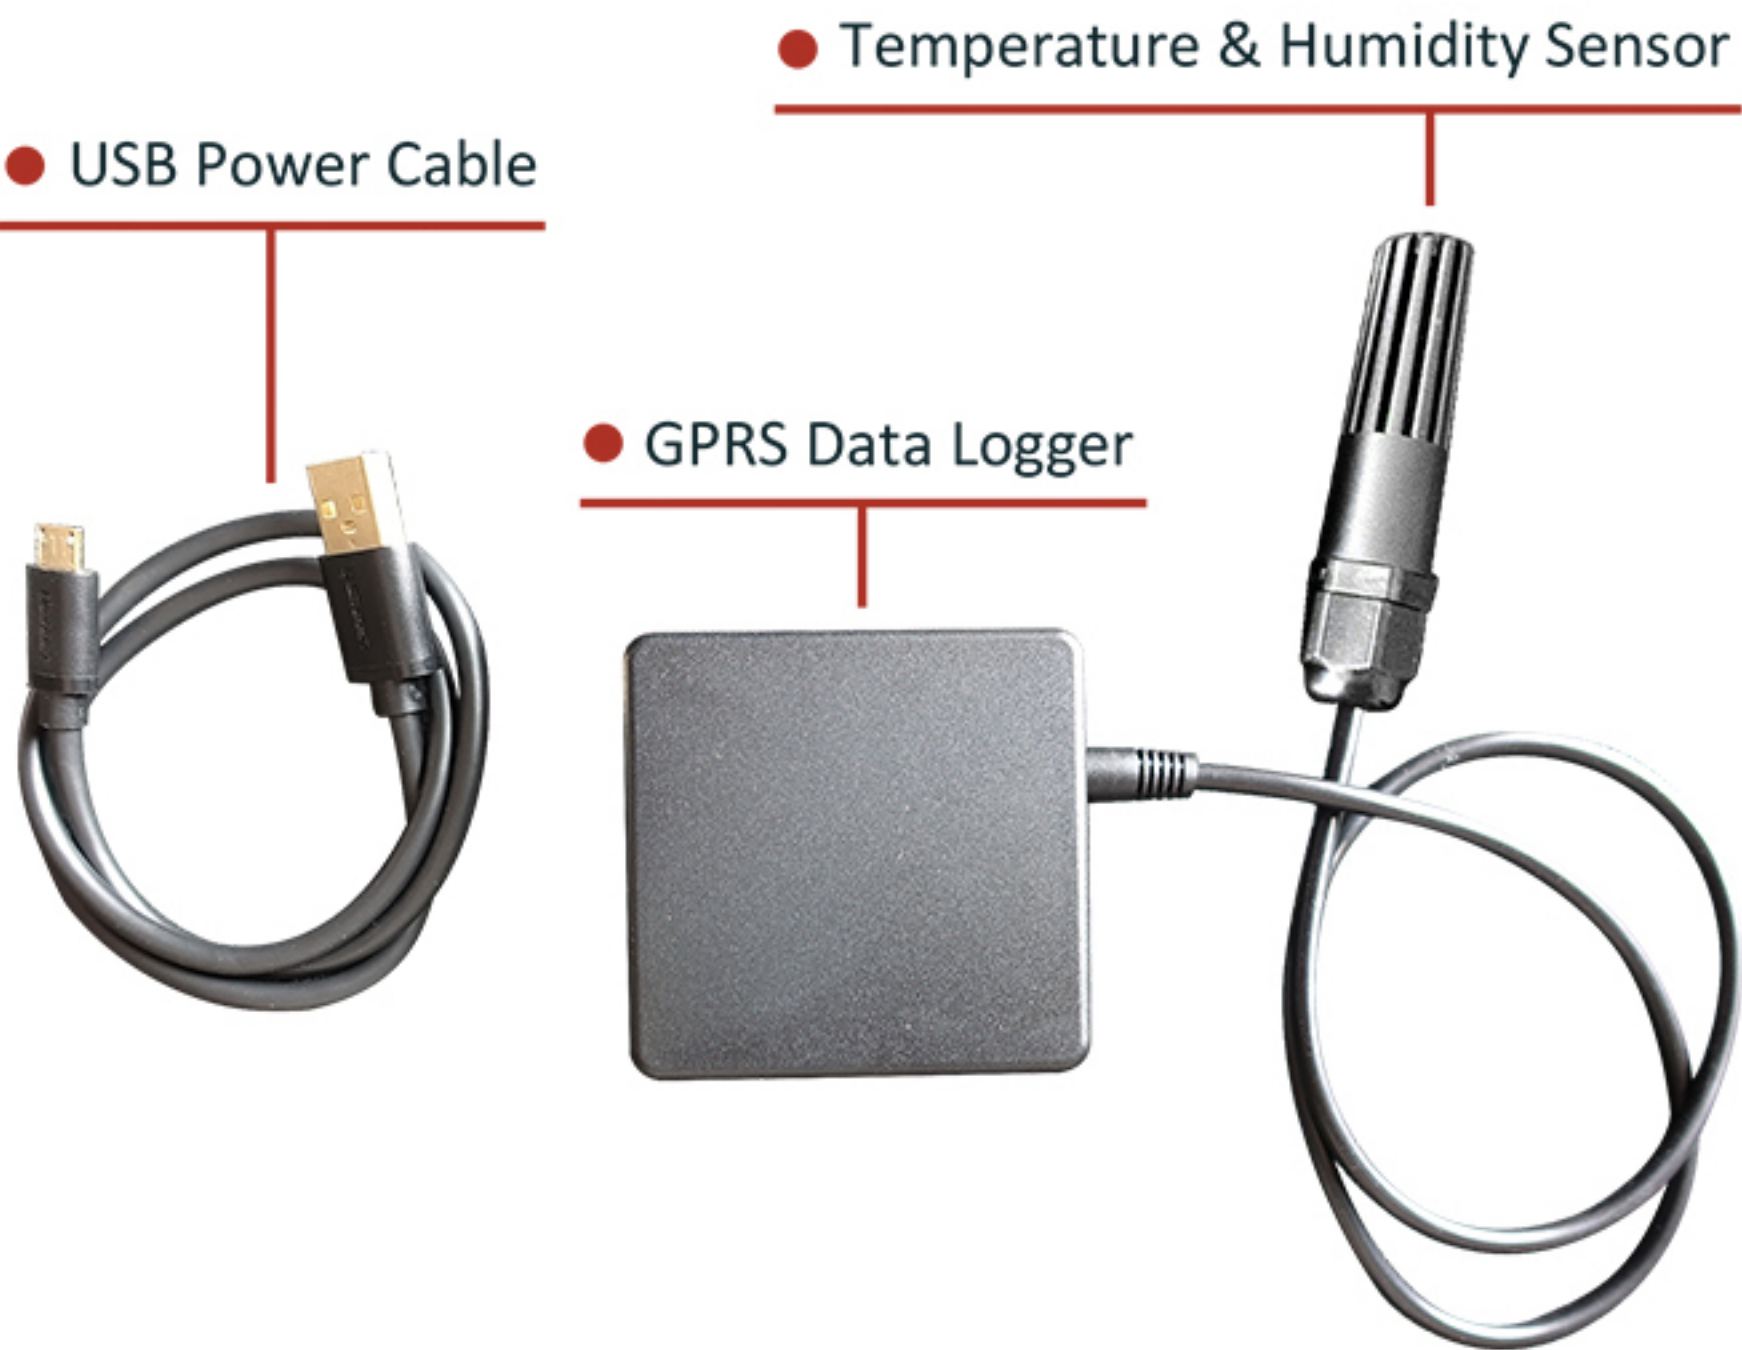

2. Micro-SIM Card & SN

1 Micro-SIM Card

- The Micro-SIM card is required for this GPRS Monitor.

2 Installation

- Insert it in the card slot. For different SIM card model, a card holder is needed if necessary.


3 SN

- SN: The serial number is the unique ID of eMonitor. The white label on the display is the SN number as shown above.

Tips

After you insert the Micro-SIM card and get SN, you can then add your device on DeviceBit.

3. Sign up by mobile App

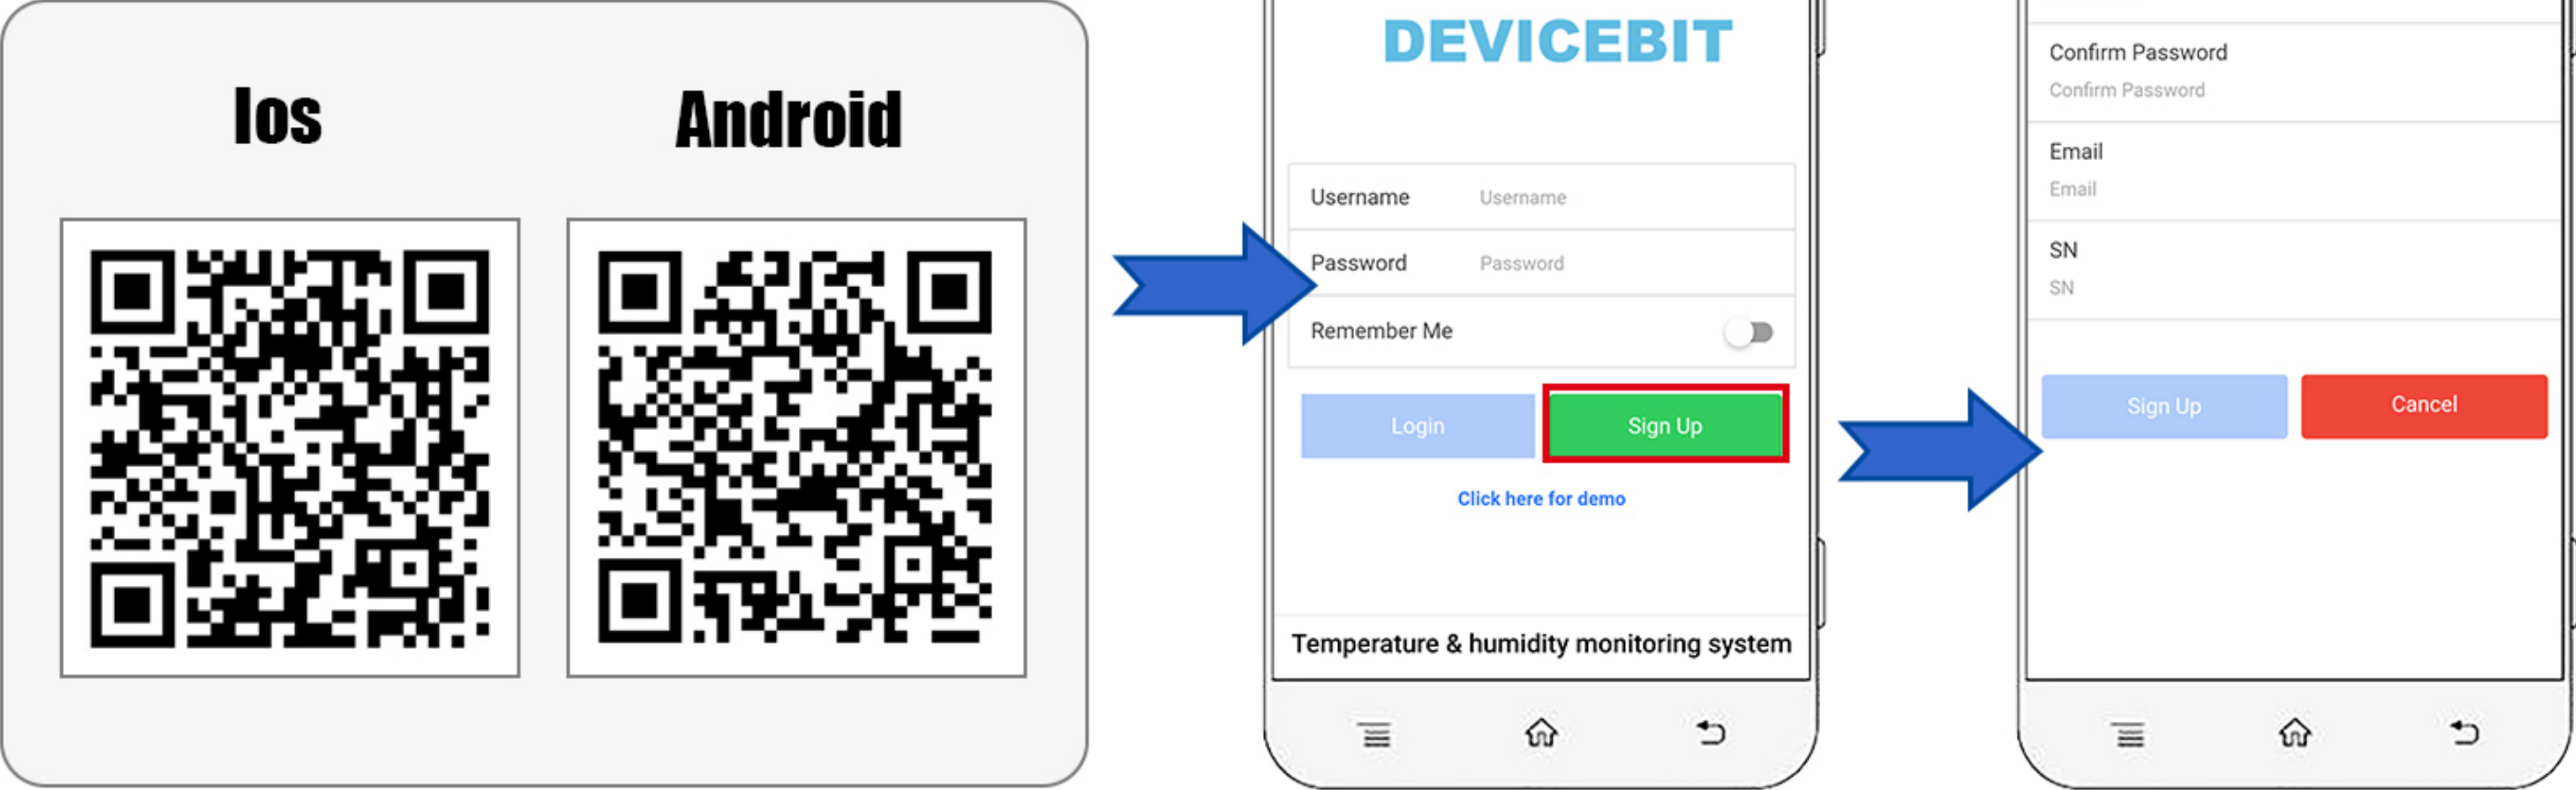


1 Download mobile app

2 Click "Sign Up" to fill in the information.

Tips

SN: The serial number of your monitor. You can find it on the label attached to the product.

4. Set the time zone

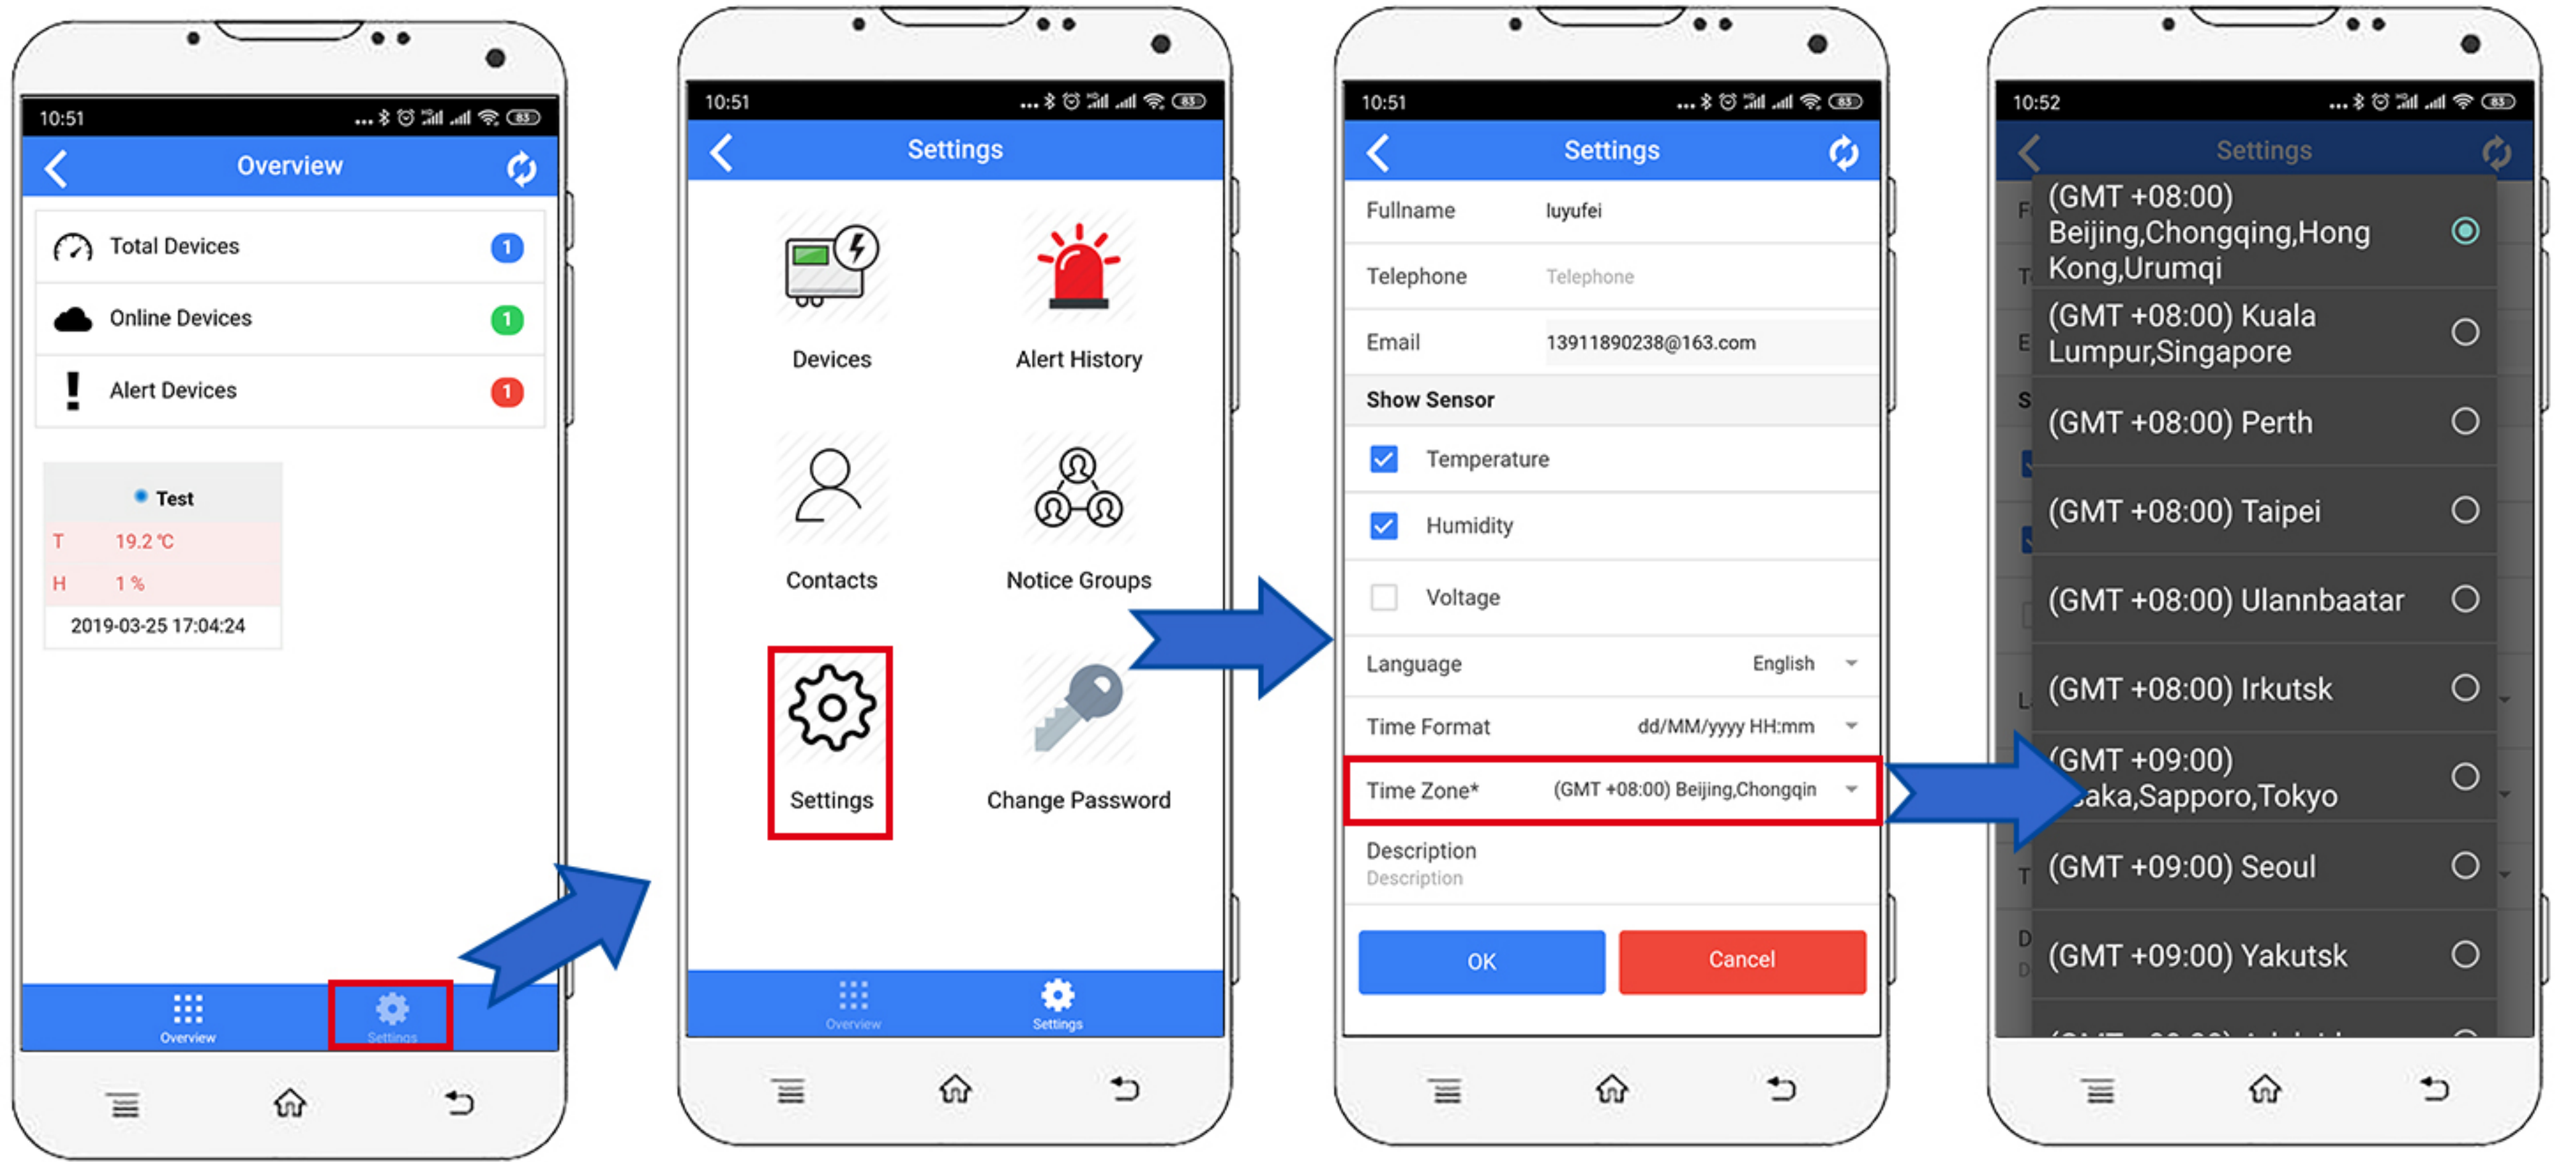

Tips


Time zone must be set according to your location for correct data display and report on time basis.

5.Edit your device



Tips You can set the name, normal value range and alarm notification settings if needed.

6.View the data

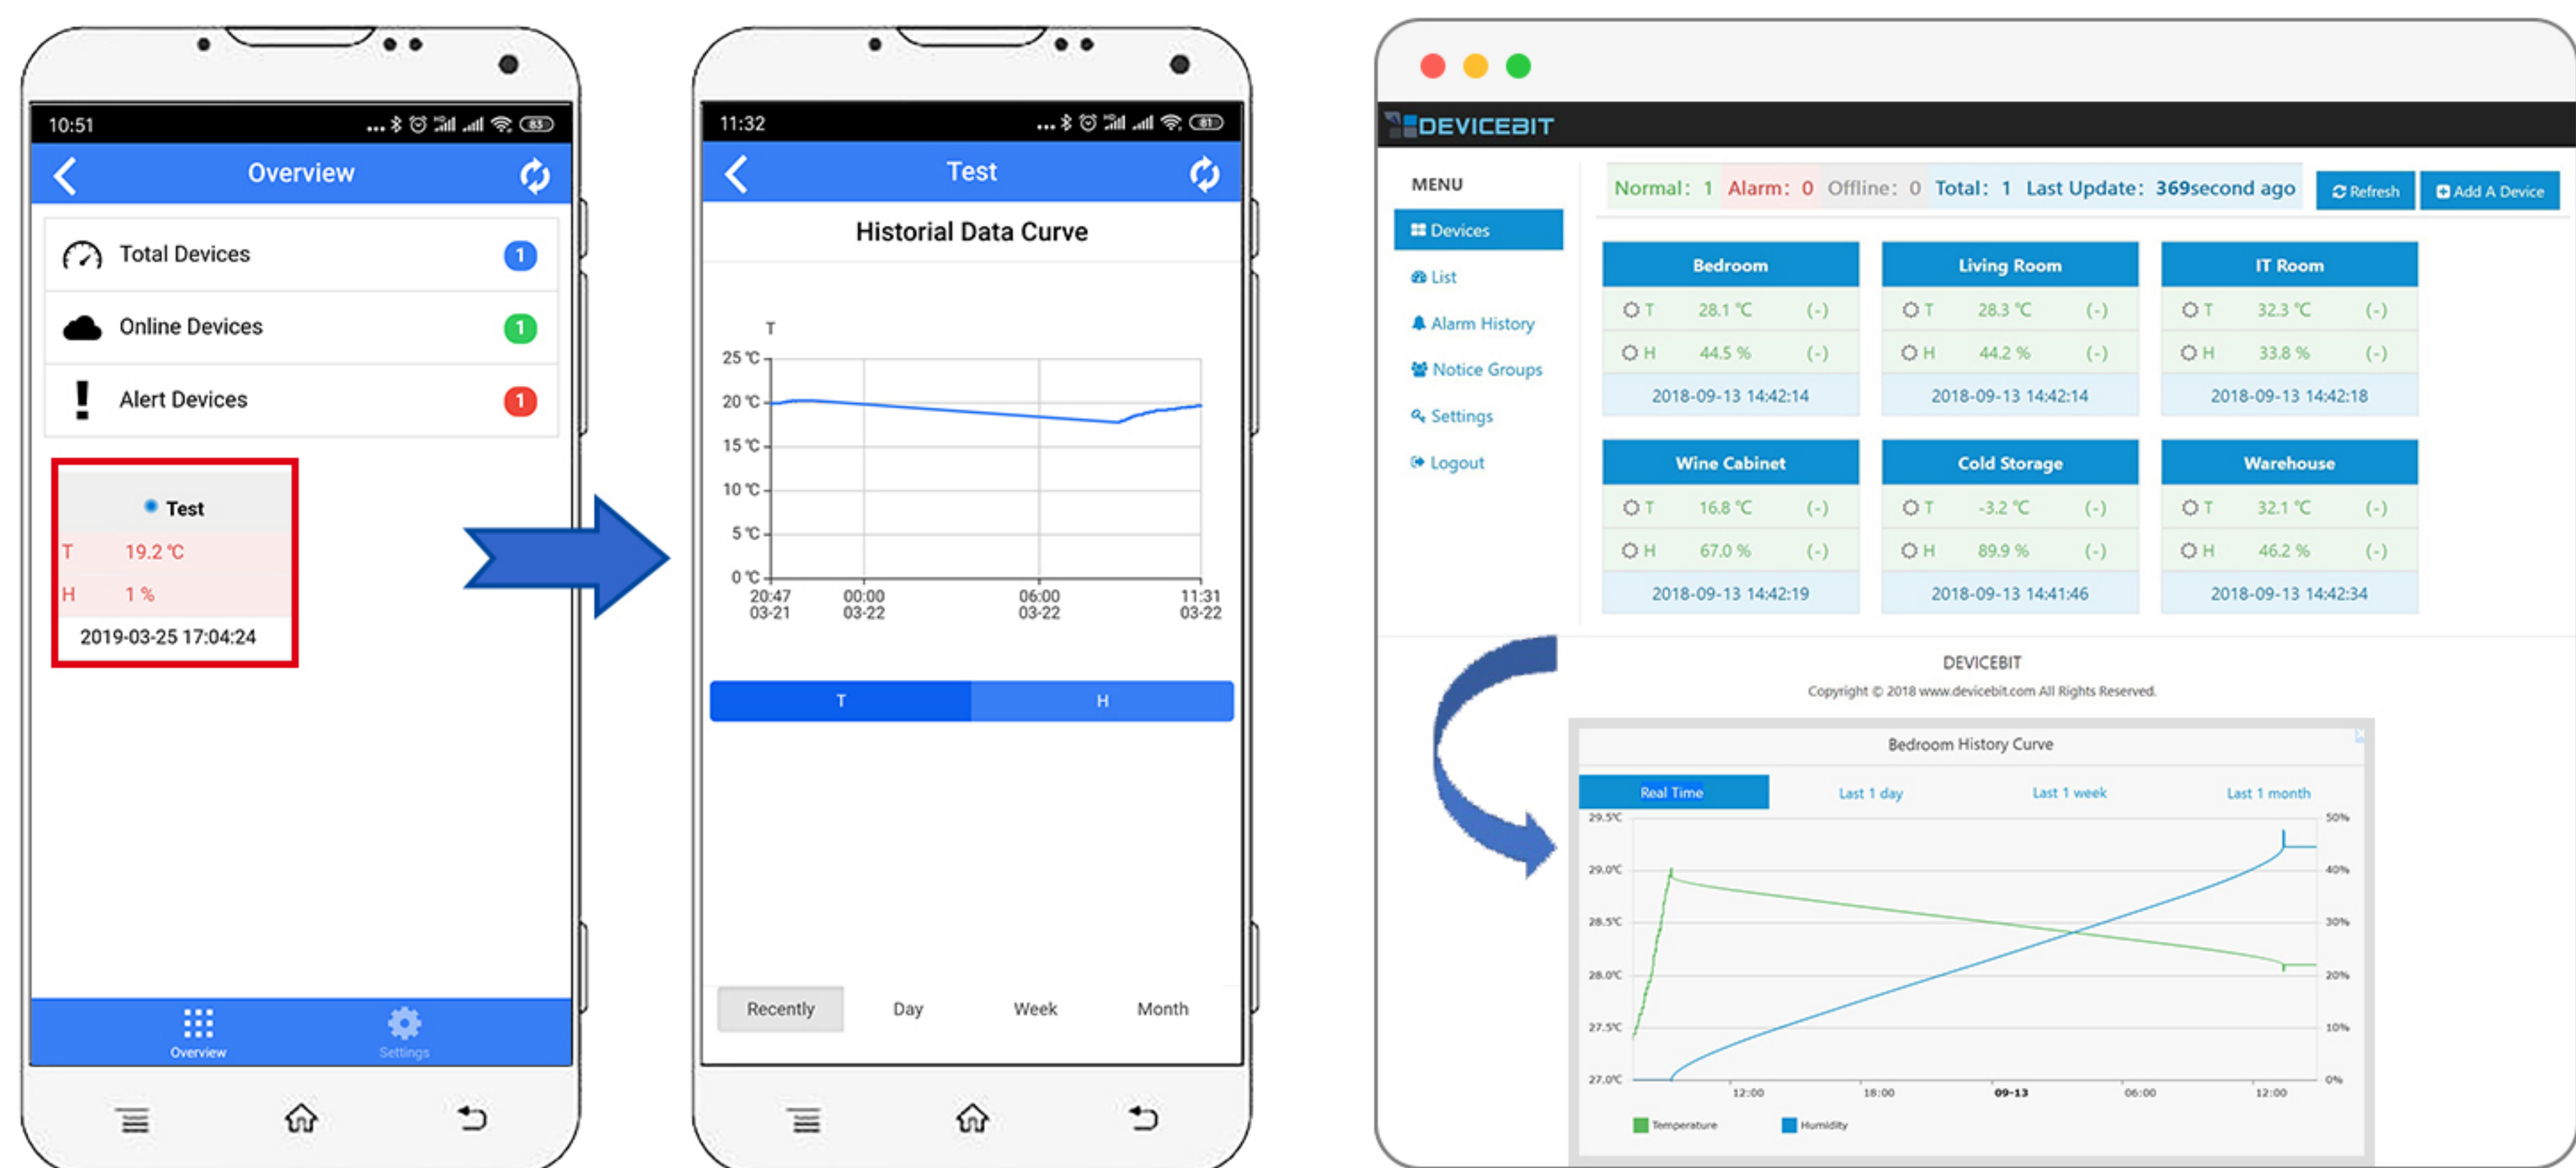

1 Date view on app

2 Date view on webpage

Tips Please visit <https://www.lwkits.com> for login on web portal. Same username and password with app.